



## HINDLE PRODUCTS LTD.

140 North Port Road  
Port Perry, Ontario  
L9L 1B2, CANADA

Tel. (905) 985-6111 | Fax. (905) 985-7349



### General Mounting Instructions for 2011-2012 KAWASAKI NINJA 400 Slip-On

Thank you for investing in a Hindle Exhaust System. Performance, quality and sound is what we're all about. Below you will find instructions to mount a Hindle Exhaust Slip-On on a 2011-2012 Kawasaki Ninja 400R (slip-on adapter part number N400SOSS). Should you have any questions about installation, please do not hesitate to contact us and we would be happy to help out.

**LEVEL OF DIFFICULTY: MEDIUM**

**TIME REQUIRED: 1-1.5 HOURS**

#### TOOLS NEEDED:

Springs (included)	Spring Installer Tool (included)
Mounting bracket (included)	Kawasaki Ninja 400R owner's/service manual
1 x 20mm bolts, 1 x nut and 2 x washers (included)	2 x 40mm bolts, 2 x nut and 4 x washers (included)
Slip-on adapter (part number N400SOSS, included)	Muffler (sold separately)
Muffler strap (sold separately, included with muffler)	Muffler strap rubber (sold separately, included with muffler)

*To install the HINDLE 2011-2012 KAWASAKI NINJA 400R slip-on, proceed with the following directions.*



Image 1

1. Remove fairings, as per service manual.
2. Remove right side driver's foot peg bracket.
3. Undo O2 sensor plug from harness. See Image 1 for reference.



Image 2

4. Remove stock muffler from head pipe. See Image 2 for reference.

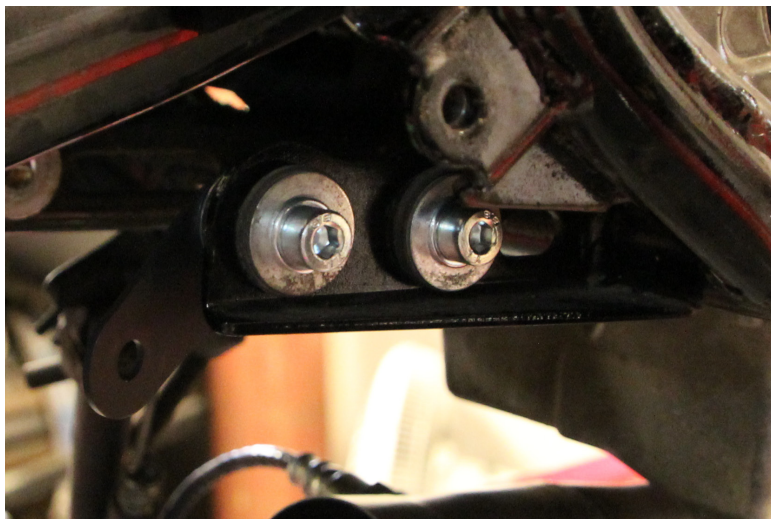


Image 3

5. Install new muffler hanger bracket with supplied 40mm bolts, nuts and washers. See Image 3 for reference.

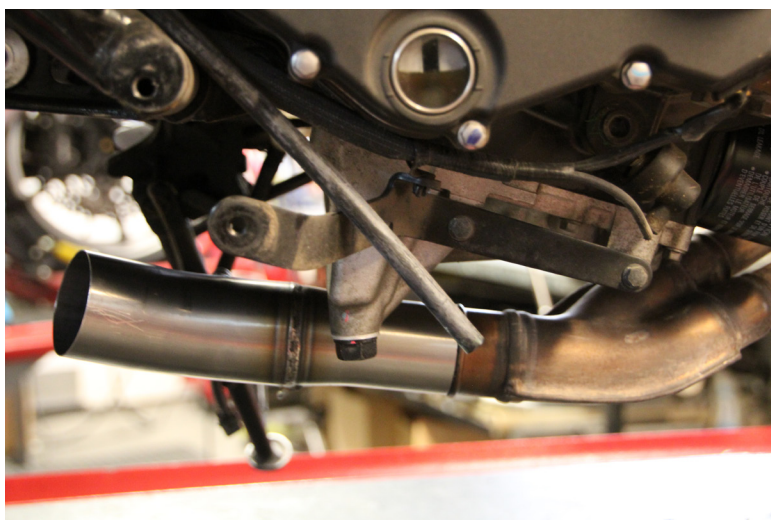


Image 4

6. Install Hindle elbow onto stock collector. See Image 4 for reference.



Image 5

7. Remove O2 sensor from stock muffler. See Image 5 for reference.





Image 6

8. Install O2 sensor onto Hindle elbow. See Image 6 for reference.

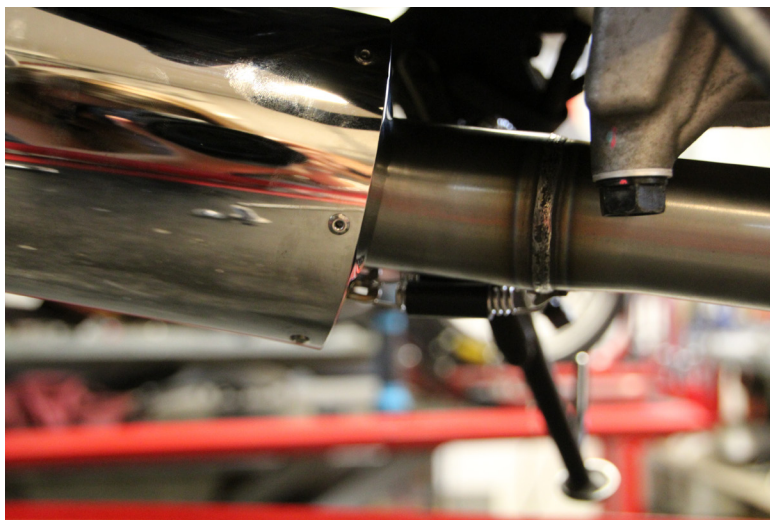


Image 7

9. Install Hindle muffler onto elbow and secure with springs (supplied). **Use spring puller tool provided to attach springs. Do not use pliers, as this will damage the springs.** See Image 7 for reference.



Image 8

10. Install muffler strap onto muffler and attach to hanger bracket with supplied 20mm bolt, nut and washers. See Image 8 for reference.

11. Re-install fairings and driver's foot peg bracket.

12. Check clearance around installed exhaust (i.e. fairing, frame and brake lever clearance).

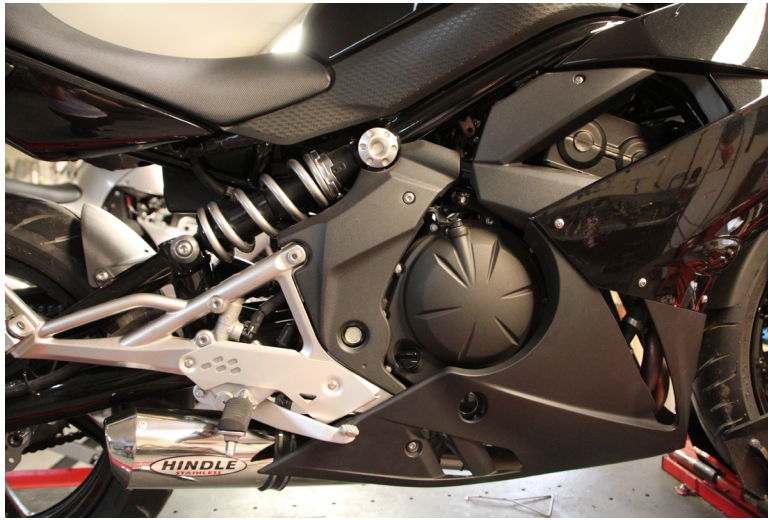


Image 9

13. Clean exhaust of oils and finger prints before running engine.

14. Start motorcycle and let idle from 10-15 minutes in order to pre-heat the muffler packing. Then, let muffler cool down completely.

15. Congratulations on the installation of your Hindle Kawasaki Ninja 400R Slip-on! See Image 9 for reference.



## WARNING

**Exhaust system(s) and muffler(s) may be hot when engine is/has been running. Take preventative measures with the handling of any Hindle system or Hindle muffler. Allow the engine to cool before installing or removing the exhaust system and/or muffler. Severe burns, bodily injury and/or death may occur.**



## WARNING

**Keep flammable materials away from exhaust at all times.**



## WARNING

**Exhaust gas contains poisonous carbon monoxide that can rapidly accumulate in an enclosed or poorly ventilated area. If inhaled, it may cause serious injury or death. Start and run the motorcycle in a well-ventilated area.**

### 12 MONTH LIMITED WARRANTY AND LIABILITY DISCLAIMER

Hindle Products Ltd. warrants this product free from defects in material or workmanship for a period of 12 months from the date of purchase, except as noted. The product warranty does not cover damage caused by misuse or abuse; accident; the attachment of any unauthorized accessory; alteration to the product, improper installation, exposure to harsh weather and/or chemicals, lack of proper maintenance, or any other conditions that are beyond the control of Hindle Products Ltd. Hindle Products Ltd. shall not be responsible for any type of incidental, consequential, or special damages. All implied warranties, including but not limited to those warranties of fitness and merchantability, are limited in the total duration to 12 months from the original purchase date. Hindle will not warrant any product for fitment issues after the system has been ran on the motorcycle for any length of time. If the warranty occurs within 30 days from the date of purchase, please contact the dealer product was purchased from. Over 30 days from the date of purchase, please contact Hindle Products Ltd. direct at (905) 985-6111 before shipping the product. Customer must contact Hindle Products Ltd. prior to sending warranty product. Claims for lost shipment, damaged shipments, or other problems regarding freight must be made directly to the responsible carrier. To obtain warranty service on Hindle Exhaust System products, mail the product prepaid and a copy of your dated sales receipt (as proof of purchase), together with a note explaining the reason for repair to this item to: **Hindle Products Ltd., 140 North Port Road, Port Perry, Ontario, Canada, L9L 1B2.** Product being returned without notification prior to shipping will be overlooked. Upon receipt, Hindle Products Ltd. will repair or replace, as appropriate, your Hindle product and return it to you, post paid. Warranty is solely through Hindle Products Ltd. Service to our products by anyone other than Hindle Products Ltd. voids warranty. Hindle Products Ltd. disclaims any and all liability for consequential or incidental damages. Hindle Products Ltd. will not be held responsible for personal damage, bodily harm or any other legal matters.